



WELL PUMPS®

Stainless Steel Submersible Pumps

3" WPS-CP the new generation of 3" pumps



Characteristics:

- Entirely made out of stainless steel
- Excellent resistance to wear
- High speed, maximum 8.200 RPM
- Discharge Rp 1 ¼"
- Very easy to install
- Motor developed to run at high speed (140Hz)
- Constant Pressure due to variable speed
- Protection against dry running
- Soft start and stop
- Single phase supply to the controller
- Protection against over and under voltage
- Two set pressures possible

The kit consists of:

- A 3" submersible pump WPS® entirely made of stainless steel. Well Pumps S.A. Specially developed this pump for high rotation speeds up to 8.200 RPM.
- A WPS® high speed submersible motor able to run at variable frequencies up to 140Hz.
- A WPS®-CP constant pressure controller including a variable speed drive, a flow detection and a pressure sensor.
- A pressure vessel of 8 liter, a valve and a pressure gauge.

Advantages!





- For 3" wells and bigger
- Pump entirely of stainless steel
- Constant pressure - variable flow
- Fast installation
- Easy to maintain
- Two set pressures possible



WELL PUMPS®

Stainless Steel Submersible Pumps

Performances:

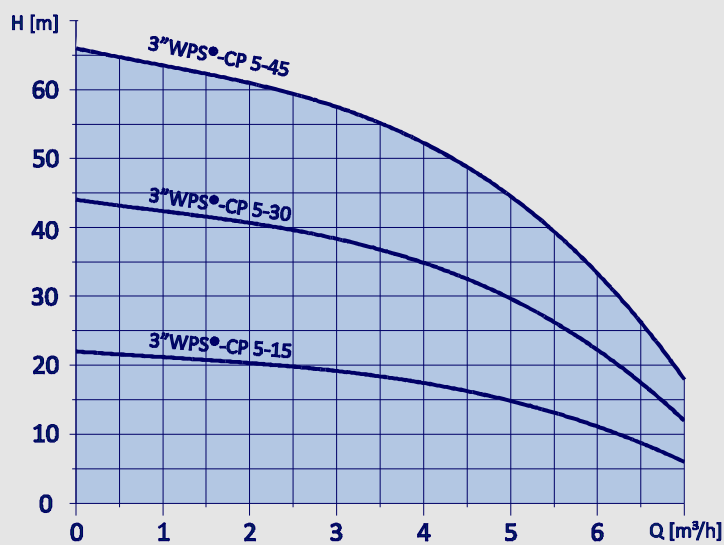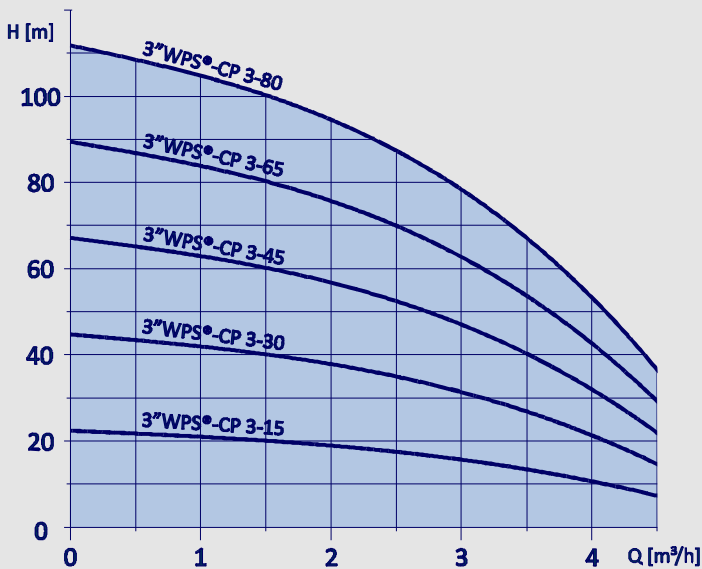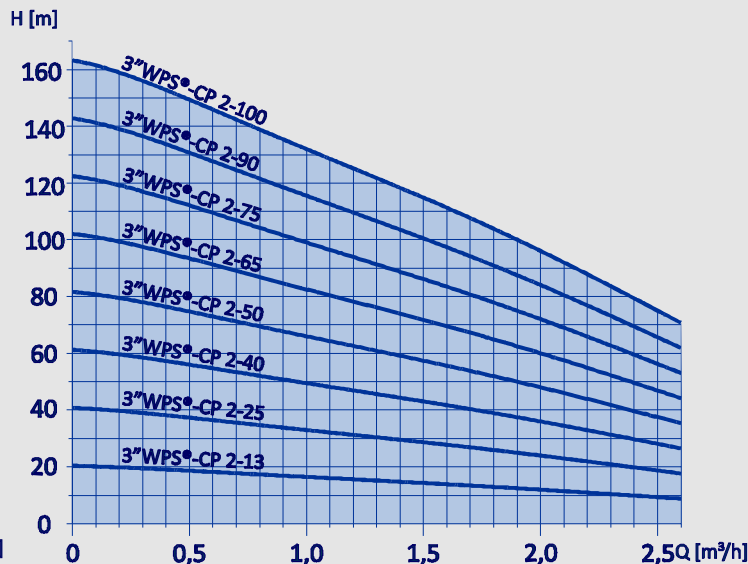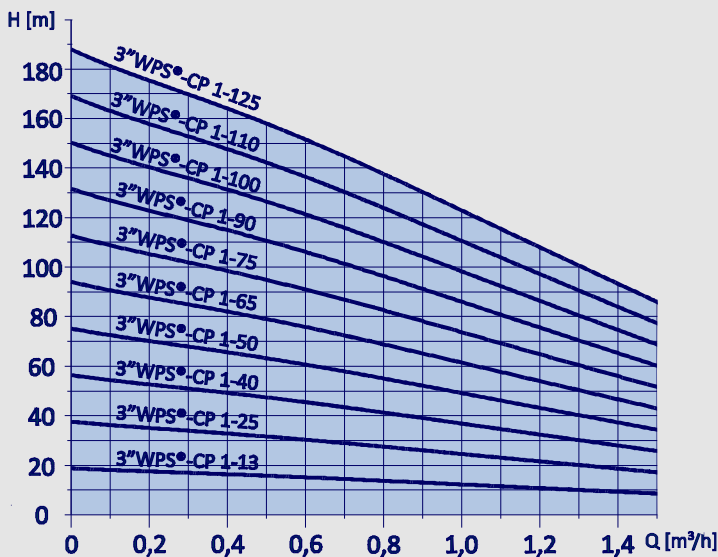

Type	Reference	P ₂	Supply	Weight	Packing
3"WPS®-CP 1-13	30100101A	600W	1x230V	11,3 kg	65x32x22cm
3"WPS®-CP 1-25	30100201A	600W	1x230V	11,5 kg	65x32x22cm
3"WPS®-CP 1-40	30100401A	600W	1x230V	11,7 kg	65x32x22cm
3"WPS®-CP 1-50	30100501A	600W	1x230V	11,8 kg	65x32x22cm
3"WPS®-CP 1-65	30100601A	900W	1x230V	12,7 kg	65x32x22cm
3"WPS®-CP 1-75	30100701A	900W	1x230V	12,9 kg	65x32x22cm
3"WPS®-CP 1-90	30100901A	1500W	1x230V	13,7 kg	65x32x22cm
3"WPS®-CP 1-100	30101001A	1500W	1x230V	13,9 kg	65x32x22cm
3"WPS®-CP 1-110	30101101A	1500W	1x230V	14,1 kg	65x32x22cm
3"WPS®-CP 1-125	30101201A	1500W	1x230V	14,2 kg	65x32x22cm

Type	Reference	P ₂	Supply	Weight	Packing
3"WPS®-CP 3-15	30300101A	600W	1x230V	11,3 kg	65x32x22cm
3"WPS®-CP 3-30	30300301A	600W	1x230V	11,5 kg	65x32x22cm
3"WPS®-CP 3-45	30300401A	900W	1x230V	12,4 kg	65x32x22cm
3"WPS®-CP 3-65	30300601A	1500W	1x230V	13,4 kg	65x32x22cm
3"WPS®-CP 3-80	30300801A	1500W	1x230V	13,5 kg	65x32x22cm

Type	Reference	P ₂	Supply	Weight	Packing
3"WPS®-CP 2-13	30200101A	600W	1x230V	11,3 kg	65x32x22cm
3"WPS®-CP 2-25	30200201A	600W	1x230V	11,5 kg	65x32x22cm
3"WPS®-CP 2-40	30200401A	600W	1x230V	11,7 kg	65x32x22cm
3"WPS®-CP 2-50	30200501A	900W	1x230V	12,6 kg	65x32x22cm
3"WPS®-CP 2-65	30200601A	900W	1x230V	12,7 kg	65x32x22cm
3"WPS®-CP 2-75	30200701A	1500W	1x230V	13,7 kg	65x32x22cm
3"WPS®-CP 2-90	30200901A	1500W	1x230V	13,9 kg	65x32x22cm
3"WPS®-CP 2-100	30201001A	1500W	1x230V	14,0 kg	65x32x22cm

Type	Reference	P ₂	Supply	Weight	Packing
3"WPS®-CP 5-15	30500101A	600W	1x230V	11,3 kg	65x32x22cm
3"WPS®-CP 5-30	30500301A	900W	1x230V	12,2 kg	65x32x22cm
3"WPS®-CP 5-45	30500401A	1500W	1x230V	13,2 kg	65x32x22cm

Options:
 20m Submersible cable 4x1,5mm³
 40m Submersible cable 4x1,5mm³
 60m Submersible cable 4x1,5mm³

Well Pumps S.A.
 Avenue de Lambusart 18
 B-6220 Fleurus - Belgium
 Tel : +32 71 46.07.83
 Fax : +32 71 46.07.71
 e-mail : info@wellpumps.be
 web : www.wellpumps.be