

# POWDER COATED STEEL WELLHEAD ASSEMBLY


Save time making up wellheads for domestic borehole casings with Proquip's purpose-designed, off-the-shelf, welded-steel wellheads.

Save time making up wellheads for domestic borehole casings with Proquip's purpose-designed, off-the-shelf, welded-steel wellheads.

In contrast to a PVC wellhead, the quality fabricated, mild steel construction provides robust protection against impact and is configured for much easier installation of surface fittings. The casing with pump and rising mains locates readily into the wellhead tube which bolts down to the well chamber or can be grouted-in to form a strong, tidy seal. This means that loads from the pump and rising main are supported by the wellhead assembly and not by the casing.

Powder coated for a pleasing, durable finish, the Proquip wellhead brings a neat, professional look to the borehole, befitting the pump & motor within.

**Available from stock to suit casings up to 8". Outlet sizes from 1½" up to 3".**  
(Different sizes, special fittings or other variants to special order – please contact Proquip Direct.)

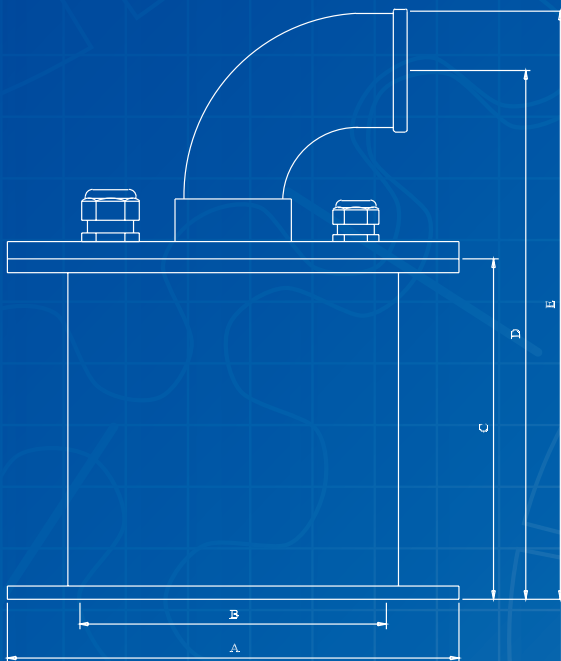

## STANDARD SPECIFICATION

Elbow Materials: Powder coated Ductile Iron

Base Materials: Powder coated Mild Steel

Gland Materials: Polypropylene

Vent / Dip tube port

Gasket: Rubber

## OPTIONS

Pressure Gauge

Sample Tap

Air Valve

Non Return Valve

Custom Fabrication

Partial / complete stainless steel

SIZE	A	B	C	D	E	MAXIMUM WELL CASING DIA.	POWER CABLE GLAND ID	PROBE CABLE GLAND ID	WEIGHT
1½"	265	180	208	310	350	175 OD	17	12	20kg
2"	265	180	208	310	350	175 OD	17	12	20kg
3"	340	222	270	440	495	220 OD	20	12	35kg

All dimensions in mm unless otherwise shown

Supplied by

**Proquip Direct Ltd**

Park Road Works • 125 Park Road • Beckenham • Kent BR3 1QJ

T 020 8639 0377 F 020 8639 0379 E sales@proquipdirect.com

[www.proquipdirect.com](http://www.proquipdirect.com)



**proquip**  
DIRECT LTD